

You get it all



The QuickJack portable lifting system makes vehicle maintenance on and off the track convenient and lightning fast. The QuickJack can go anywhere and is easily stowed in the trunk or back seat of most cars. Bring it to the track, or drop it on your garage floor to perform routine maintenance in the comfort of your home, all in seconds.



Built-in wheels →

The QuickJack replaces clumsy floor jacks and unstable jack stands with a safe, durable and convenient vehicle jacking and support system. Simply position the lightweight jack frames under the vehicle, push the raise button on the hand-held pendant control, and in seconds the entire car is about 21" off the ground, ready for tire changes, chassis tuning or other maintenance.

The ruggedly built frames collapse to a low three-inch profile, so they fit where other jacks and lifts don't. With QuickJack, practicality and portability become reality. Because the QuickJack is void of any cross members, it provides total undercar access and can be installed at a width that best suits the vehicle being raised.

Call **1-800-661-5313** or visit www.quickjack.ca

QUICKJACK™

The Ultimate Portable Car Lift

- Sets up in seconds
- Safe and durable
- Easy to use
- Portable



4 WEIGHT CAPACITIES
3,500 • 5,000 • 6,000 • 7,000 lbs.

 **See it on YouTube**



6 MODELS TO CHOOSE FROM


Specifications:

	BL-3500SLX	BL-5000SLX	BL-5000EXT	BL-7000SLX	BL-7000EXT	BL-6000XLT
Lifting Capacity	3,500 lbs. / 1,588 kg	5,000 lbs. / 2,268 kg	5,000 lbs. / 2,268 kg	7,000 lbs. / 3,175 kg	7,000 lbs. / 3,175 kg	6,000 lbs. / 2,722 kg
Individual Frame Weight	60 lbs. / 27 kg	76 lbs. / 35 kg	80 lbs. / 36 kg	96 lbs. / 44 kg	101 lbs. / 46 kg	110 lbs. / 50 kg
Raised Height (frame only)	16.5" / 419 mm	17.6" / 447 mm	17.6" / 447 mm	18.2" / 462 mm	18.2" / 462 mm	18.2" / 462 mm
Raised Height (stacked blocks)	20" / 508 mm	21.3" / 542 mm	21.3" / 542 mm	21.5" / 546 mm	21.5" / 546 mm	21.6" / 548 mm
Collapsed Height	3" / 75 mm	3" / 75 mm	3" / 75 mm	3.6" / 91 mm	3.6" / 91 mm	3.6" / 91 mm
Lifting Point Spread - MIN	26.7" / 678 mm	29.5" / 749 mm	37.4" / 951 mm	29.5" / 749 mm	37.4" / 951 mm	47.4" / 1,205 mm
Lifting Point Spread - MAX	50.5" / 1,283 mm	60" / 1,524 mm	66" / 1,676 mm	60" / 1,524 mm	66" / 1,676 mm	75.8" / 1,926 mm
Frame Width	10.6" / 268 mm	11" / 278 mm	11" / 278 mm	12.5" / 318 mm	12.5" / 318 mm	12.5" / 318 mm
Frame Length	62" / 1,575 mm	70" / 1,778 mm	75" / 1,905 mm	70" / 1,778 mm	76" / 1,930 mm	86" / 2,185 mm

Optional Accessories


SUV & Light Truck Adapter Kit

- (4) Contact pads
- (4) Sliding receivers
- (4) 3" Stackable adapters

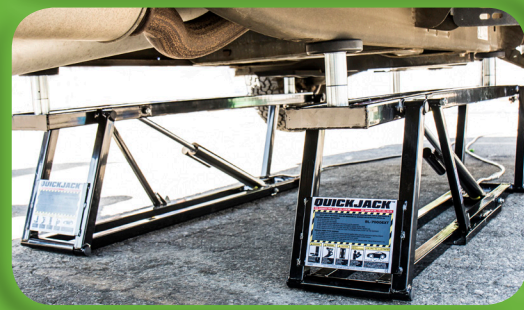

SLX Frame Extension Kit

- (2) Frame extension adapters with 66" lift point spread each
- Rugged 14-gauge steel construction
- Easy to carry
- Fits BL-SLX series models

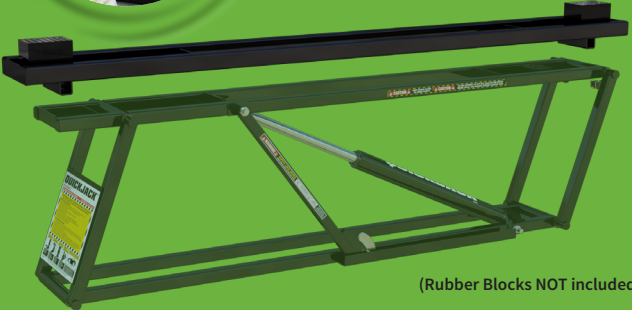

(Rubber Blocks NOT included)

ATV / Motorcycle Lift Adapter Kit

- Heavy-duty tie-down rings
- Aluminum diamond tread plate
- Adjustable wheel clamp

(Compatible with all models except BL-6000XLT)



Motorcycle Lift Adapter Kit



- Tie-down rings
- Lightweight platform
- Adjustable wheel clamp
- Easy installation

(Motorcycle Jack not included)

QUICKJACK™