
Service Manual

Service Parts & Diagrams

HD-9SW

BendPak SKU 5260529 HD-9SW Four-Post Car Lift Version K 06/03/2016

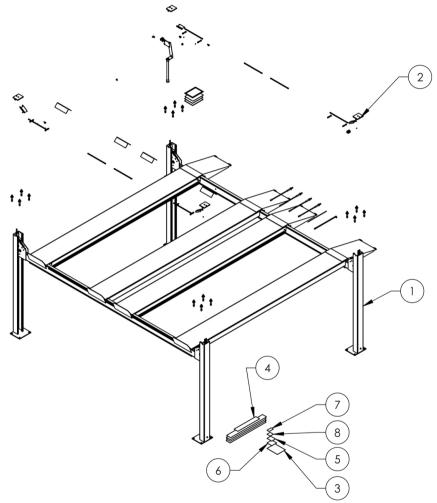

This guide is a troubleshooting reference used for maintaining and servicing your BendPak product. It provides comprehensive information on identifying serviceable parts and components and assists in troubleshooting problems and performing assembly/disassembly procedures.



BendPak, Inc. Corporate Office

1645 Lemonwood Drive Santa Paula, CA 93060 USA Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 info@bendpak.com

Customer Service Desk / Warranty

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 customerservice@bendpak.com

Parts Orders

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 parts@bendpak.com

Domestic Sales & Service


USA Sales Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 sales@bendpak.com

International Sales & Service

bpkexports@bendpak.com

Office Tel: 1-805-933-9970 Exports Department: 1-805-933-9970 Ext. 192 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160


REVISION								
REV	DESCRIPTION	DATE	EDITED BY	ECO#				
С	ADDED 5905103, 5905200, 5905402, 5905465, 5905940, AND 5930605, UPDATED BOM REVISIONS	08/14/2015	TM	00683				
D	REMOVED 5930605, ADDED 5905952 UPDATED BOM REVISIONS	12/2/2015	JM	00740				
Е	UPDATED BOM REVISIONS	12/30/2015	JM	00741				

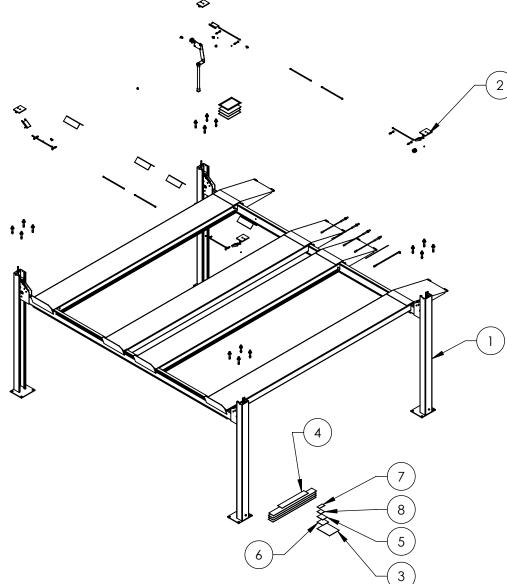


NOTE: UNLESS OTHERWISE SPECIFIED.


- SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING ALL LABELS TO BE APPLIED TO POSTS AFTER PAINTING. SEE ATTACHED LABEL PLACEMENT SHEET
- 2. 3.

ITEM NO.	PART N	UMBER		DESC	CRIPTION		QTY	. REV
1	5245	390	HD-	-9SW LIFT	SUPERSTRUCTURE		1	E
2	5250)197		PARTS B	SOX	HD-9SW	1	F
3	5905	103		WARNIN	GΑ	LI/WL 200	1	
4	5905	200	4	POST DEC	CAL	KIT, LESS ALI	1	В
5	5905	402		MAX C	AP [DANGER	1	
6	5905	465		MANUFA	CTU	RER LABEL	1	
7	5905	940		PRODUC	T D	ATA LABEL	1	
8	5905	952	SERIAL	NUMBER	INT	ERIOR TAG PLATE	1	
DO NOT SCALI	EDRAWING		NAME	DATE				
			TM	08/12/2014	BP BendPak, 1645 LE/		LEMON A PAUL	NWOOD DR. A, CA 93060
DIMENSIONS	APE IN MAA	CHECKED	-	-				
THIRE PROPER THE INFORMATI THE SOLE PROPER REPRODUCTION		THIRD /	THIRD ANGLE PROJECTION		TITLI	HD-9SW PRO LIFT VER K (
		'			SIZE	DWG. NO.		REV
		THE INFORMATION THE SOLE PROPER	PROPRIETARY AND CONFIDENTIAL E INFORMATION CONTAINED IN THIS DRAWING IS E SOLE PROPERTY OF BENDPAK INC. ANY PRODUCTION IN PART OR AS INC. ANY E WRITTEN PERMISSION OF BENDPAK INC. IS OHISTED.		Α	5260529)	E
		THE WRITTEN PERM				SCALE: 1:60		SHEET 1 OF 2

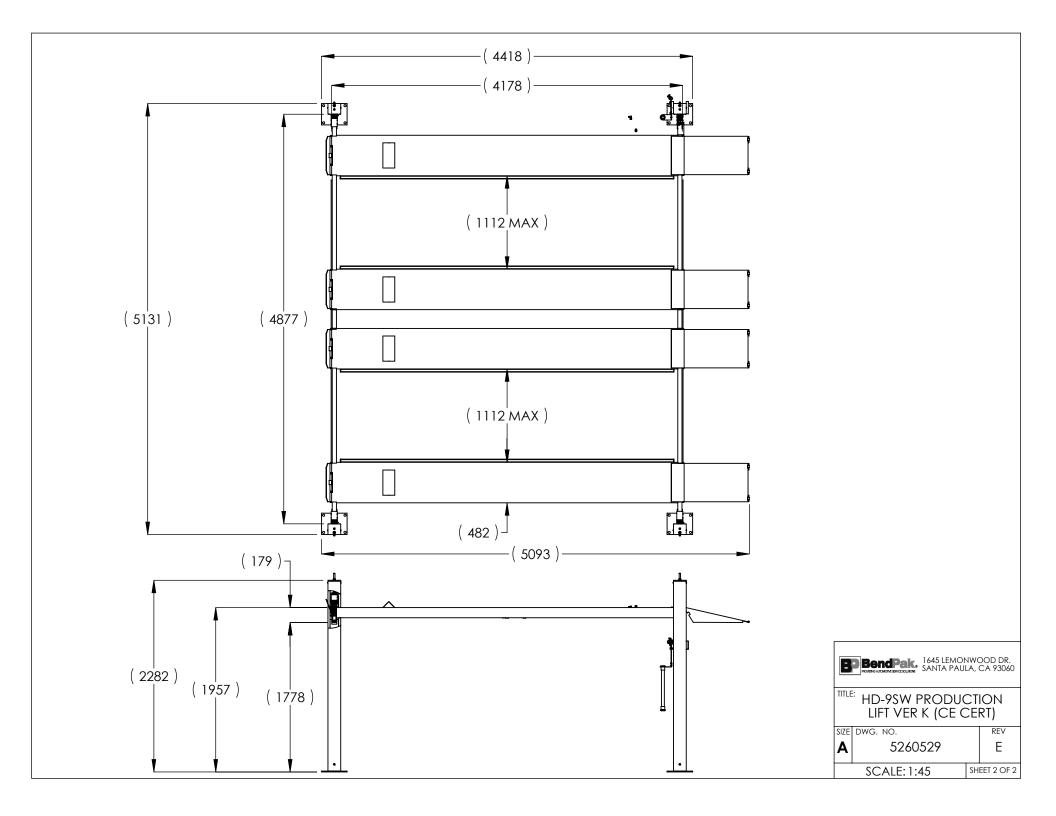

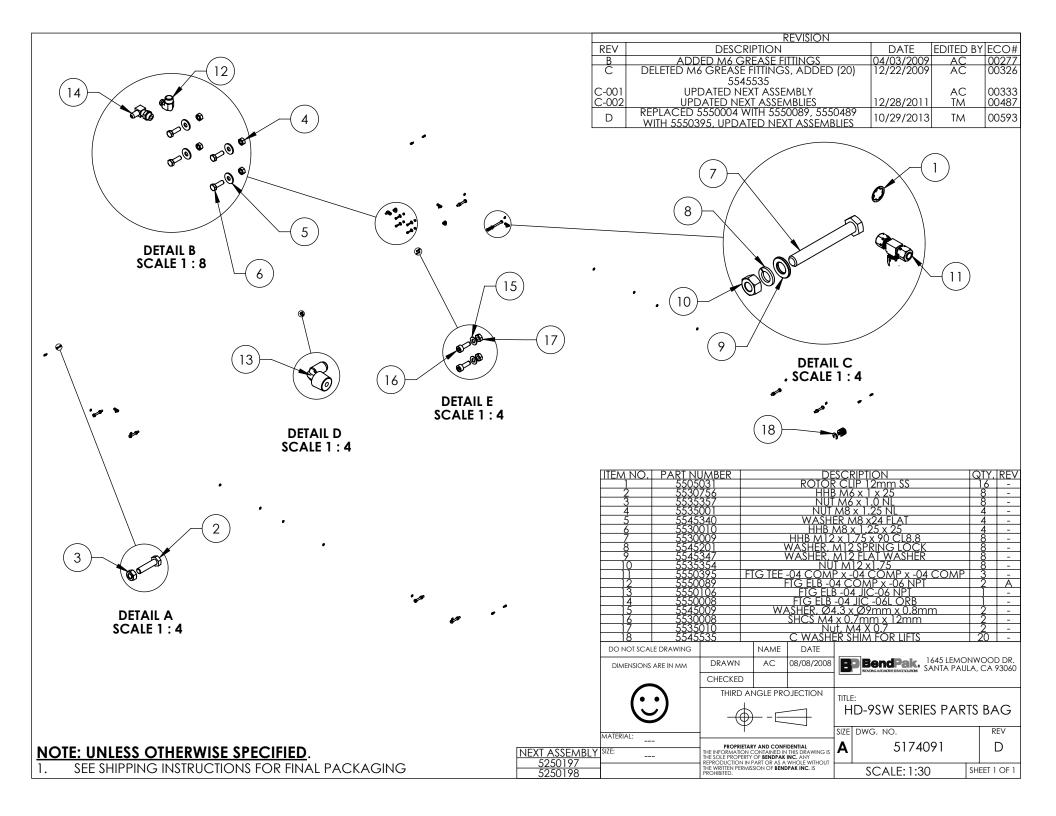

REVISION				
REV	DESCRIPTION	DATE	EDITED BY	ECO#
D	UPDATED NEXT ASSEMBLY, ADDED 5550486	02/24/2010	AC	00333
D-001	UPDATED NEXT ASSEMBLY	01/21/2011	TM	00439
D-010	UPDATED NEXT ASSEMBLIES	07/24/2013	TM	00611
Е	REPLACED 5550481 WITH 5550087	10/29/2013	TM	00593
F	REPLACED 5590240 WITH 5590175, UPDATED NEXT ASSEMBLIES	05/05/2015	MR	00683

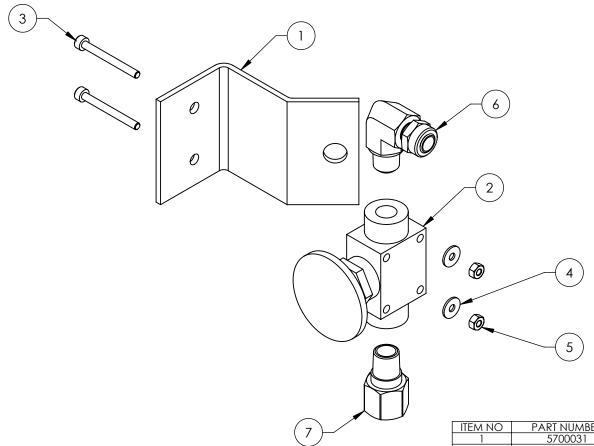

ITEM NO PART NUMBER		DESCRIPTION	QTY	REV
1	5700031	ZERO ANGLE MTG BRACKET	1	С
2	5590175	PUSH BUTTON AIR VALVE	1	В
3	5530043	SHCS M3 x 0.5 x 30	2	-
4	5545024	WASHER M3 x 9mm	2	-
5	5535020	NUT M3 x 0.5 NL	2	-
6	5550087	FTG ELB -04 COMP x -02 NPT	1	-
7	5550486	FTG NPL -02 NPT x -04 F NPT	1	-

DO NOT SCALE DRAWING NAME DATE DRAWN AC 3/14/2008 CHECKED 09/02/2015

DIMENSIONS ARE IN MM

THIRD ANGL

LE PROJECTION	TI
	P

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BANDAYA INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN FERMISSION OF BENDPAK INC. IS
PROHIBITED.

BPBendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

PUSH BUTTON AIR ASSEMBLY


SIZE DWG. NO. REV F 5215096 SCALE: 2:3 SHEET 1 OF 1


NOTE: UNLESS OTHERWISE SPECIFIED. 1. ASSEMBLE ITEMS AS SHOWN



REVISION							
REV	DESCRIPTION	DATE	EDITED BY	ECO#			
В	UPDATED BOM REVISIONS, UPDATED NEXT ASSEMBLY	11/14/2008	AC	00174			
С	UPDATED BOM REVISION	04/22/2010	TM	00351			
D	UPDATED TITLE TO REFLECT WHERE USED, UPDATED BOM REVISIONS	06/10/2010	AC	00366			
D-001 D-002	UPDATED NEXT ASSEMBLY UPDATED NEXT ASSEMBLY	01/20/2011 06/06/2011	TM TM	00439 00464			



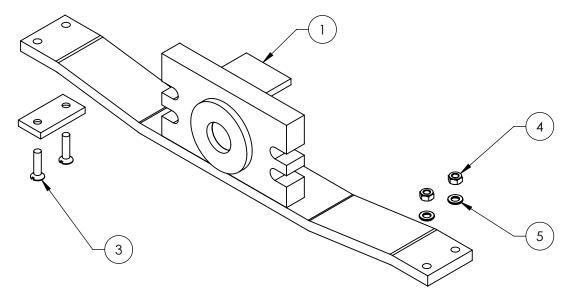



ITEM NO	PART NUMBER	DESCRIPTION		REV
1	5600901	HD-7500/9 SERIES CYLINDER FLANGE ARM WELDMENT		D
2 5715090		CYL. FLANGE ARM SLIDE		Α
3 5530069		FHS M6 x 1.0 x 25		-
4 5535357		NUT M6 x 1.0 NL		-
5	5545005	M6 FLAT WASHER	4	-

DO NOT SCALE DRAWING

DIMENSIONS ARE IN MM

DRAWN

CHECKED

MT

O7/06/2011

THIRD ANGLE PROJECTION

MATERIAL:

PROPRIEARY AND COMPRESSION
THE SINE PROPRIEARY AND COMPRESSION
THE SINE PROPRIES OF CONTRACTOR INTO A STATE OF THE SINE PROPRIES OF THE


HD-7500/9 CYLINDER
FLANGE ARM ASSEMBLY
SIZE DWG. NO. REV
5215129 D

BPBendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060


SCALE: 1:3 SHEET 1 OF 1

NOTE: UNLESS OTHERWISE SPECIFIED.

1. ASSEMBLE ITEMS AS SHOWN

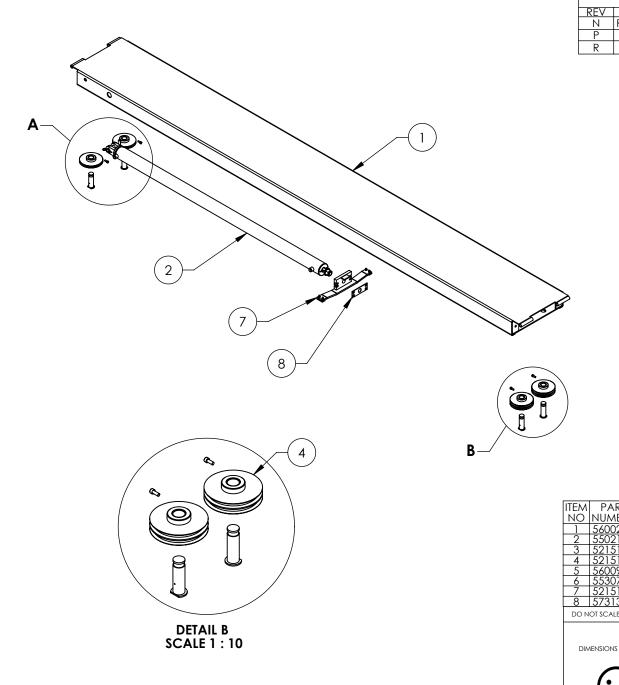

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
Ν	REMOVED 5505350, 5545031 AND 5535026	01/13/2015	MR	00675
Р	UPDATED BOM REVISION	03/30/2015	MR	00683
R	REMOVED (4) 5550025	11/25/2015	JM	00740

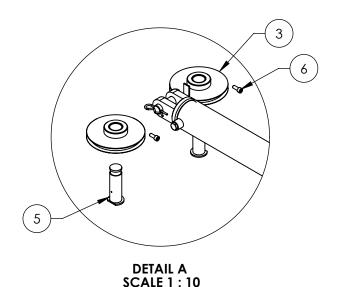

ITEM	PART	DESCRIPTION	ΟTV	REV	
NO	NUMBER	DESCRIPTION			
1	5600200	HD-7500BL/9/9ST/9SW POWER SIDE RAMP WELDMENT	1	F	
2	5502165	CYLINDER ASSEMBLY Ø3.0 x 70	1	G	
3	5215122	HD-7/7500/9 SERIES SINGLE SHEAVE ROLLER ASSEMBLY	2	D	
4	5215123	HD-7/7500/9 SERIES TWIN SHEAVE ASSEMBLY	2	D	
5	5600900	HD-7/7500/9 SERIES RAMP SHEAVE SHAFT WELDMENT	4	D	
6	5530773	SHCS M8x1.25x20mm L	4	-	
7	5215129	HD-7500/9 CYLINDER FLANGE ARM ASSEMBLY	1	D	
8	5731309	CABLE RETAINER PLATE	1	Α	

DO NOT SCALE DRAWING NAME DATE BP BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060 DRAWN AC 11/13/2008 CHECKED DIMENSIONS ARE IN MM THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTINUED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDAYA INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED.

TITLE: HD-7500BL/9/9ST/9SW POWER SIDE RAMP **ASSEMBLY** REV


SIZE DWG. NO. 5215190


SCALE: 1:25 SHEET 1 OF 2


R

NOTE: UNLESS OTHERWISE SPECIFIED.


- SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING
- ASSEMBLE ITEMS AS SHOWN



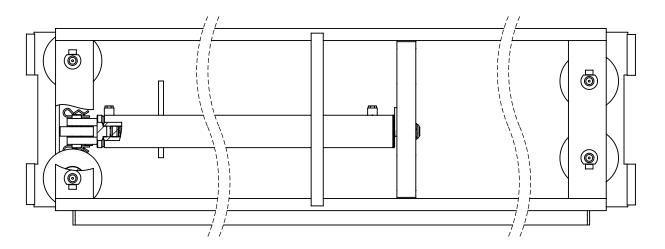



	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
С	UPDATED BOM REVISION	10/06/2009	AC	00300
D	UPDATED BOM REVISIONS REPLACED 5535112 WITH 5535357	06/10/2010	AC	00366
Е	UPDATED TITLE TO REFLECT WHERE USED,	01/20/2011	TM	00439
	UPDATED BOM REVISION AND NEXT ASSEMBLY			
E-001	UPDATED NEXT ASSEMBLY	10/27/2011	TM	00487
E-002	UPDATED NEXT ASSEMBLIES	05/22/2013	TM	00593
E-003	UPDATED NEXT ASSEMBLIES	08/14/2014	TM	00664

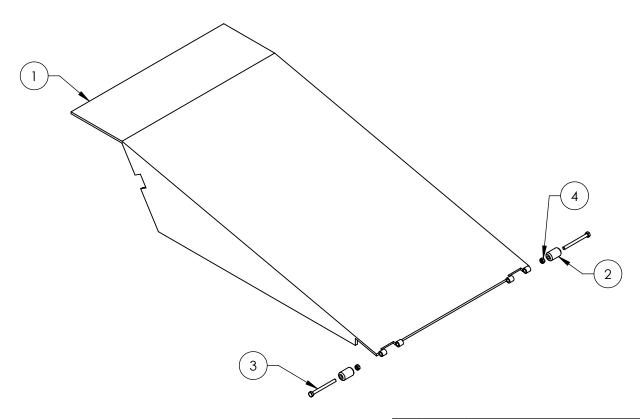

ITEM PART	DESCRIPTION				QTY	REV
1 5600194	HD-9A/9SW	HD-9A/9SW/9SWX/9AE DRIVE UP RAMP WELDMENT				E
2 5716149	HD-7500/9, HD/S-14 SERIES DRIVE UP RAMP PLASTIC			2	F	
3 5530005		ŀ	НВ M6 x	1 x 70	2	-
4 5535357		1	<u> 101 M6 x</u>	1.0 NL	1 2	-
DO NOT SCALE DRAW	ING	NAME	DATE			
	DRAWN	AC	06/13/2008	BP BendPak. 1645 LEMO SANTA PAU	NWOOI _A, CA '	D DR. 93060

DRAWN CHECKED DIMENSIONS ARE IN MM THIRD ANGLE PROJECTION



TITLE: HD-9A/9SW/9SWX/9AE DRIVE UP RAMP ASSEMBLY


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDA'S INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED. SCALE: 1:8

	DICITE OF ICTURE 7 (00 ETVIDE)						
SIZE	DWG. NO.	REV					
Α	5215194	F					
	SCALE: 1:8	SHEET 1 OF 1					

- NOTE: UNLESS OTHERWISE SPECIFIED.

 1. SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING
- 2. ASSEMBLE ITEMS AS SHOWN

NEXT ASSEMBL	Υ.
5245389	
5245390	
5245393	
5245394	

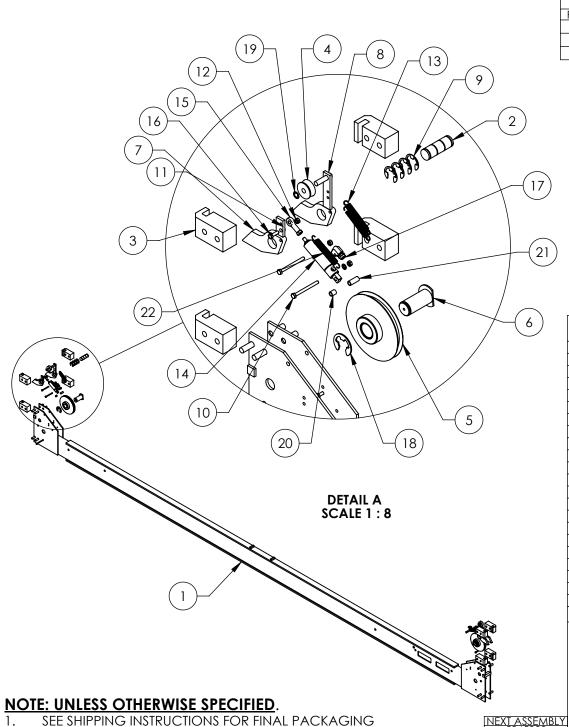

2.

ASSEMBLE ITEMS AS SHOWN

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
Е	REPLACED 5545026 WITH 5545005	03/20/2015	MR	00683
F	REMOVED (2) 5550025 AND (2) 5916630	12/2/2015	JM	00740
C	UPDATED BOM REVISIONS	12/30/2015	JM	00741

TEM NO	PART NUMBER	DESCRIPTION	QTY	REV	
1	5600649	HD-9SW/SWX CROSSTUBE 4-SHEAVE WELDMENT	1	F	
2	5746008	HD/HDS-7/7500/9/14, HDSO-14 SAFETY PIN	2	E	
3	5716005	HD-7/7500/9/14/HDSO-14 PLASTIC SLIDE BLOCK	8	J	
4	5575420	HD-7/7500/9 SERIES SAFETY ROLLER	2	С	
5	5215122	HD-7/7500/9 SERIES SINGLE SHEAVE ROLLER ASSEMBLY	2	D	
6	5600160	HD-7/7500/9 SERIES CROSSTUBE SHEAVE SHAFT WELDMENT	2	E	
7	5600760	HD/HDS LIGHT DUTY SERIES SAFETY WELDMENT	2	В	
8	5600044	HD/HDS LIGHT DUTY SERIES SLACK SAFETY WELDMENT	2	F	
9	5540275	E RING Ø25mm OD DIN 6799 0250	8	-	
10	5530005	HHB M6 x 1 x 70	6	-	
11	5545005	M6 FLAT WASHER	4	-	
12	5535357	NUT M6 x 1.0 NL	8	-	
13	5540065	SPRING Ø13mm x 90mm, SLACK SAFETY	4	Α	
14	5502195	AIR CYLINDER, Ø19mm x 25 STROKE	2	-	
15	5505625	FEMALE ROD END M6 x 33mm	2	-	
16	5530093	HHB M6 x 1 x 20	2	-	
17	5550087	FTG ELB -04 COMP x -02 NPT	2	-	
18	5540010	E RING Ø32mm OD DIN 6799	2	-	
19	5505030	ROTOR CLIP 10mm SS	2	-	
20	5755136	HD AIR CYLINDER SPACER 12mm	2	В	
21	5755137	HD AIR CYLINDER SPACER 25mm			
22	5540070	SPRING Ø13mm x 89mm, AIR CYLINDER	2	В	

DATE

04/30/2013

CHECKED - THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONFIDENTIAL
THE INFORMATION FOR A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROPHIETIED.

DRAWN

NAME

TM

DO NOT SCALE DRAWING

HD-9SW/SWX CROSSTUBE ASSEMBLY, LARGE WINDOW


BP BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

SIZE DWG. NO. 5215619

SCALE: 1:30 SHEET 1 OF 1

REV

G

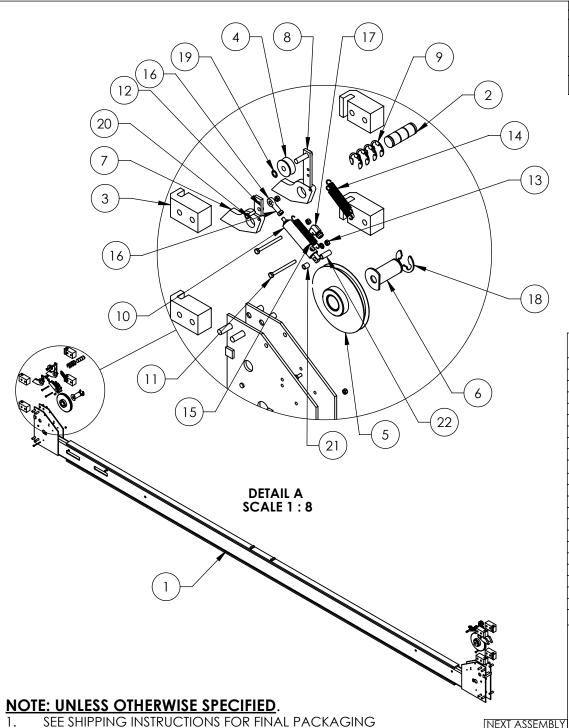

ASSEMBLE ITEMS AS SHOWN

2.

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
Е	REPLACED 5545026 WITH 5545005, REVERSED 5600160, 5540010, 5550025, UPDATED BOM REVISION	03/20/2015	MR	00683
F	REMOVED (2) 5716630 AND (2) 5550025	12/2/2015	JM	00740
G	UPDATED BOM REVISIONS	12/30/2015	JM	00741

ITEM NO	PART NUMBER				DESCRIP [*]	TION		QTY	REV
1	5600648		HD-9SW/95	SWX CI	ROSSTUBE	2-SHEAVE WI	LDMENT	1	F
2	5746008		HD/HD:	S-7/750	00/9/14, H	DSO-14 SAFE	TY PIN	2	Е
2	5716005		HD-7/7500)/9/14/	HDSO-14	PLASTIC SLIDE	BLOCK	8	J
4	5575420		HD-	7/7500	/9 SERIES	SAFETY ROLLE	R	2	С
5	5215122	HD	HD-7/7500/9 SERIES SINGLE SHEAVE ROLLER ASSEMBLY						
6	5600160	HD-7	7/7500/9 SE	RIES C	ROSSTUBE	SHEAVE SHA	ft weldment	2	Е
7	5600760		HD/HDS L	LIGHT D	OUTY SERIE	S SAFETY WEL	.DMENT	2	В
8	5600044 HD/HDS LIGHT DUTY SERIES SLACK SAFETY WELDMENT						2	F	
9	5540275		E RI	NG Ø2	25mm OD	DIN 6799 025	50	8	-
10	5502195		AIR	CYLINE	DER, Ø19r	nm x 25 STRO	KE	2	-
11	5530005 HHB M6 x 1 x 70						6	-	
12	5545005		M6 FLAT WASHER						-
13	5535357	35357 NUT M6 x 1.0 NL						8	-
14	5540065		SPRING	G Ø 131	mm x 90m	nm, SLACK SA	FETY	4	Α
15	5540070		SPRIN	G Ø 131	mm x 89n	nm, AIR CYLIN	IDER	2	В
16	5505625		F	<u>EMALE</u>	ROD END	<u> M6 x 33mm</u>		2	-
17	5550087					<u> ИР x -02 NPT</u>		2	-
18	5540010		E	RING	Ø32mm (<u>OD DIN 6799</u>		2	-
19	5505030			RO1	OR CLIP	<u> 10mm SS</u>		2	-
20	5530093				<u>HHB M6 x</u>			2	-
21 5755136						SPACER 12mn		2	В
22	5755137		HD	AIR C	YLINDER S	PACER 25mn	1	2	В
DO NOT SCALE DRAWI				NAME	DATE				

04/30/2013

TM

THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTINUED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.

DRAWN

CHECKED

DIMENSIONS ARE IN MM

BP BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060


HD-9SW/SWX CROSSTUBE ASSEMBLY, SMALL WINDOW


5215620


SCALE: 1:30

G


SHEET 1 OF 1

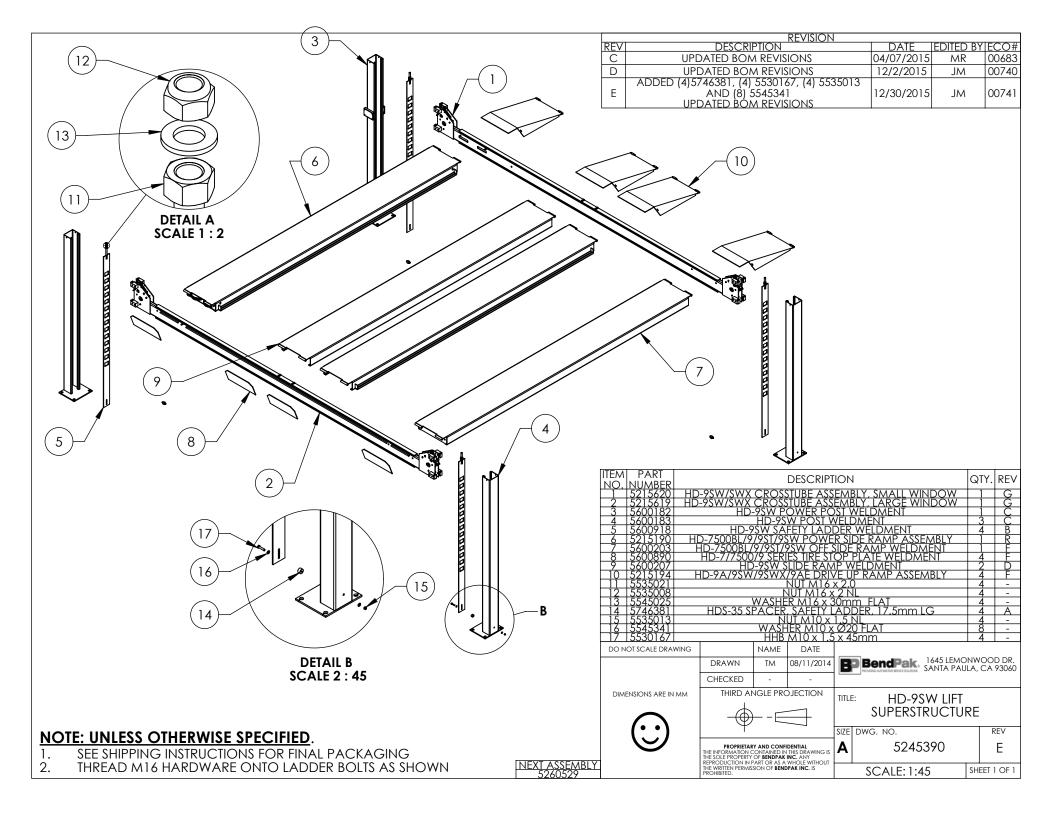

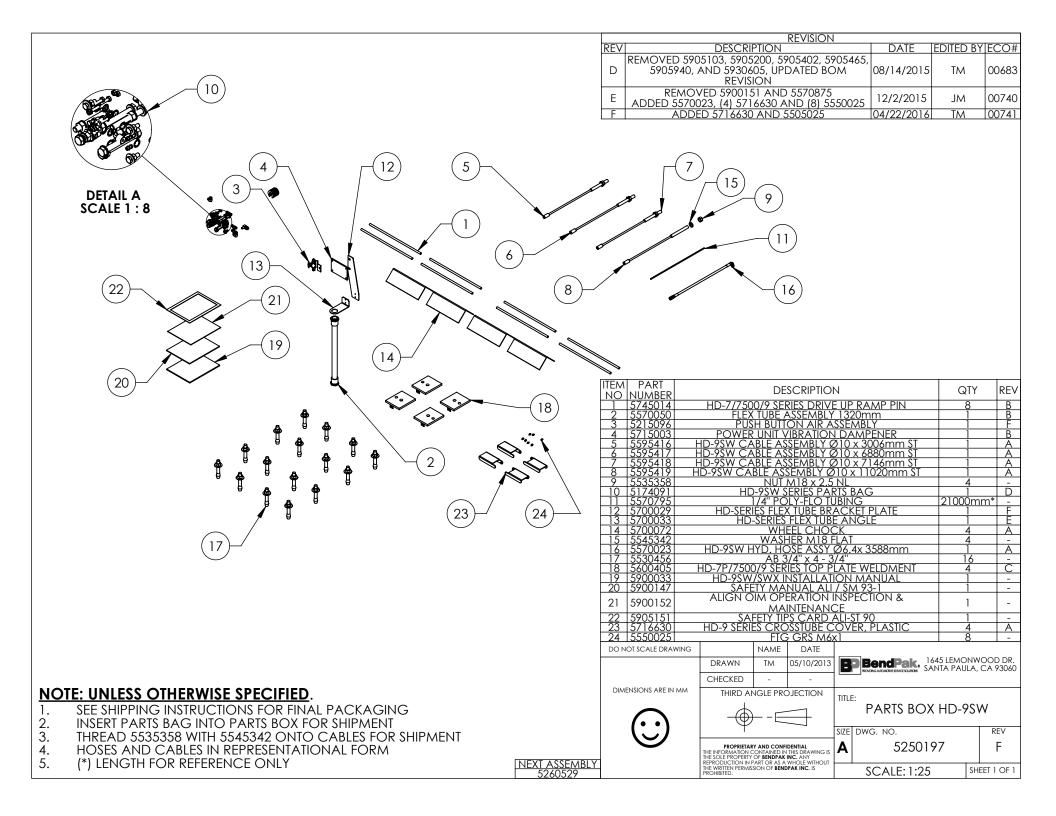

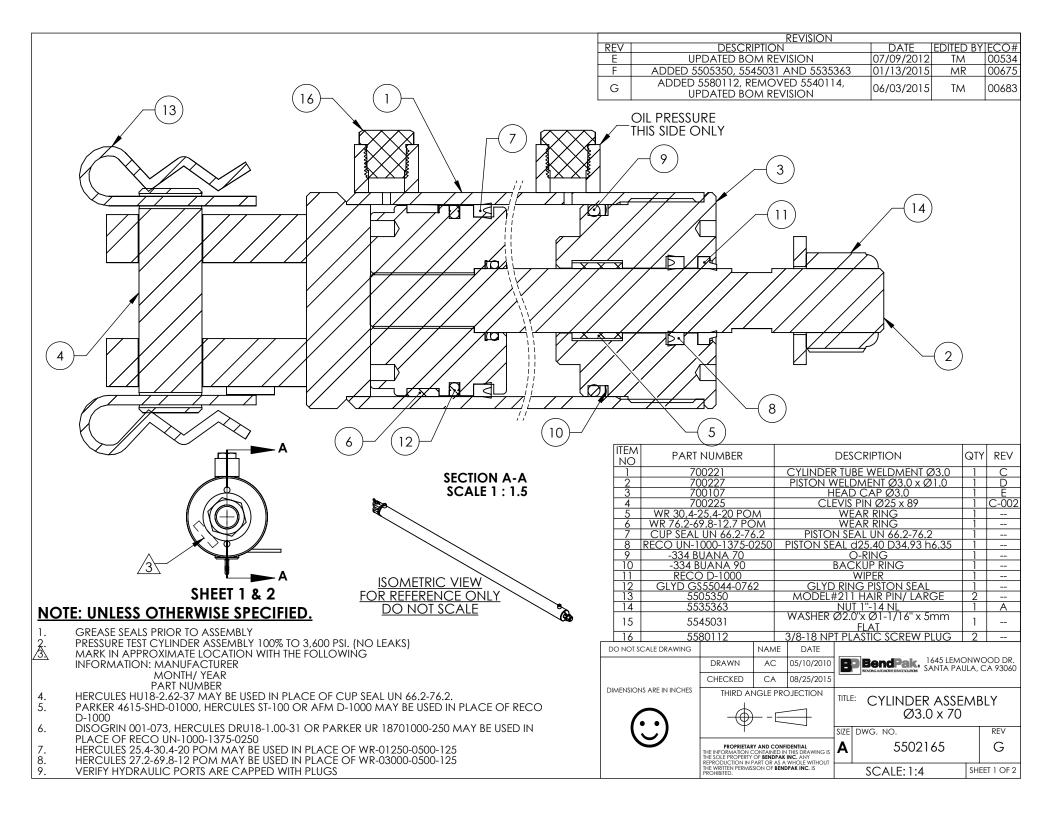

	REVISION									
REV	DESCRIPTION	DATE	EDITED BY	ECO#						
Α	PRODUCTION RELEASE	12/3/2015	JM	00740						

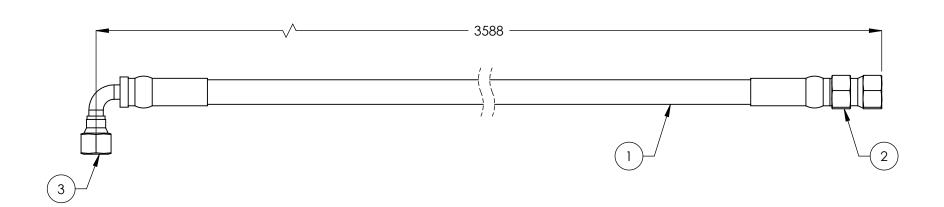

			E	SOM Table	9		
ITEM NO.	PART	NUMBER		DESC	QTY.	REV	
1	55	70129	Ø	6.4 ID HY	3498mm*	Α	
2	55	50325	FTG	NPL Ø1/4	1	T -	
3 5550345			FTG	ELB Ø1/4	1	-	
DO NOT SCALE D	RAWING		NAME	DATE			
		DRAWN	JM	12/03/2015		45 LEMONWOOI .NTA PAULA, CA	
		CHECKED	-	-			
DIMENSIONS ARE IN TOLERANCES:		THIRD AI	NGLE PRO	DJECTION	TITLE:		
0. = ±1.5 0.0 = ±0.5					HD-9SW HYD	. HOSE AS	SY
ANGULAR: 0. =	<u>+</u> 2°	'	⊢-	\exists	Ø6.4x 3588mm		
CLIDEACE EINIICH 1.4	ISO Ba um				SIZE DWG. NO.		REV

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BANDAR INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN FERMISSION OF BENDPAK INC. IS
PROHIBITED.

Α

SHEET 1 OF 1

5570023

SCALE: 1:2


NOTE: UNLESS OTHERWISE SPECIFIED.

FOR ITEM 1 SPECIFICATIONS REFER TO PART SPECIFICATION FORM (*)ITEM 1 QTY FOR REFERENCE ONLY 2.

NEXT ASSEMBLY 5250197

SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED

	REVISION			
REV.	DESCRIPTION	DATE	EDITED BY	ECO#
Α	PRODUCTION RELEASE	12/24/2007	AC	00104
A-001	CHANGED SURFACE FINISH FROM 3.2 µm TO	09/05/2008	GJ	00237
	1.6 Ra µm			
A-002	UPDATED NEXT ASSEMBLY	10/02/2008	AC	00140
В	UPDATE TUBE TO NEW STYLE, UPDATED NEXT	12/11/2008	AC	00256
	ASSEMBLY AND TITLE			
B-001	UPDATED NEXT ASSEMBLY	05/04/2009	AC	00277
B-013	UPDATED NEXT ASSEMBLIES	05/17/2013	TM	00593

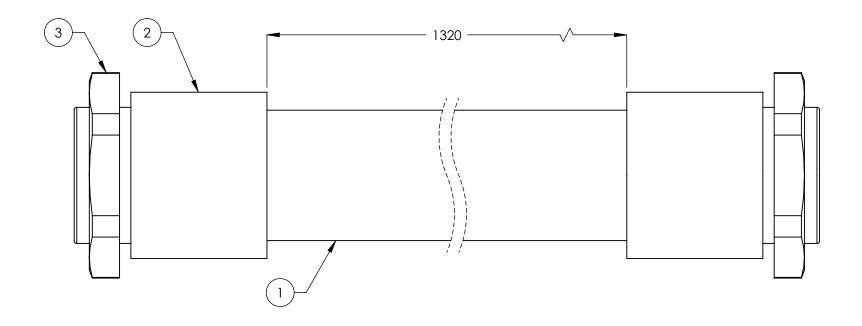

IIEM NO	PARI NUMBER	DESCRIPTION	QIY.	KFA
1	5570053	PE FLEX TUBE Ø34.5xØ29	1386mm*	-
2	555555	WQG1-M36/AD34.5 CONNECTOR	2	-
3	5535050	PLASTIC NUT M36 x 2	2	-

DO NOT SCALE DRAWING		NAME	DATE					
DIMENSIONS ARE IN MM TOLERANCES:	DRAWN	AC	12/24/2007	В	BendPak, 1645 LEMONWO SANTA PAULA,			
$0. = \pm 1.5$ $0.0 = \pm 1.0$	CHECKED							
0.00 = ±0.25 0.000 = ±0.13	THIRD ANGLE PROJECTION				TITLE: FI FX TUBE			
ANGULAR: MACH ±2° SURFACE FINISH 1.6 ISO Ra µm	$ $ \downarrow	_	—		ASSEMBLY 1320m	nm		
FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED	l Ψ		\Box	CIZE	DWG. NO.	RFV		
MATERIAL:	<u> </u>			SIZE	DWG. NO.	KEV		

FLEX TUBE ASSEMBLY 1320mm

SIZE DWG. NO.

REV 5570050 В

NEXT ASSEMBLY SIZE: HD/HDS/HDSO SERIES


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDA'R INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED.


SCALE: 1:1 SHEET 1 OF 1

SPECIFICATION FORM
(*)ITEM 1 QTY FOR REFERENCE ONLY

NOTE: UNLESS OTHERWISE SPECIFIED.

FOR ITEM 1 SPECIFICATIONS REFER TO PART

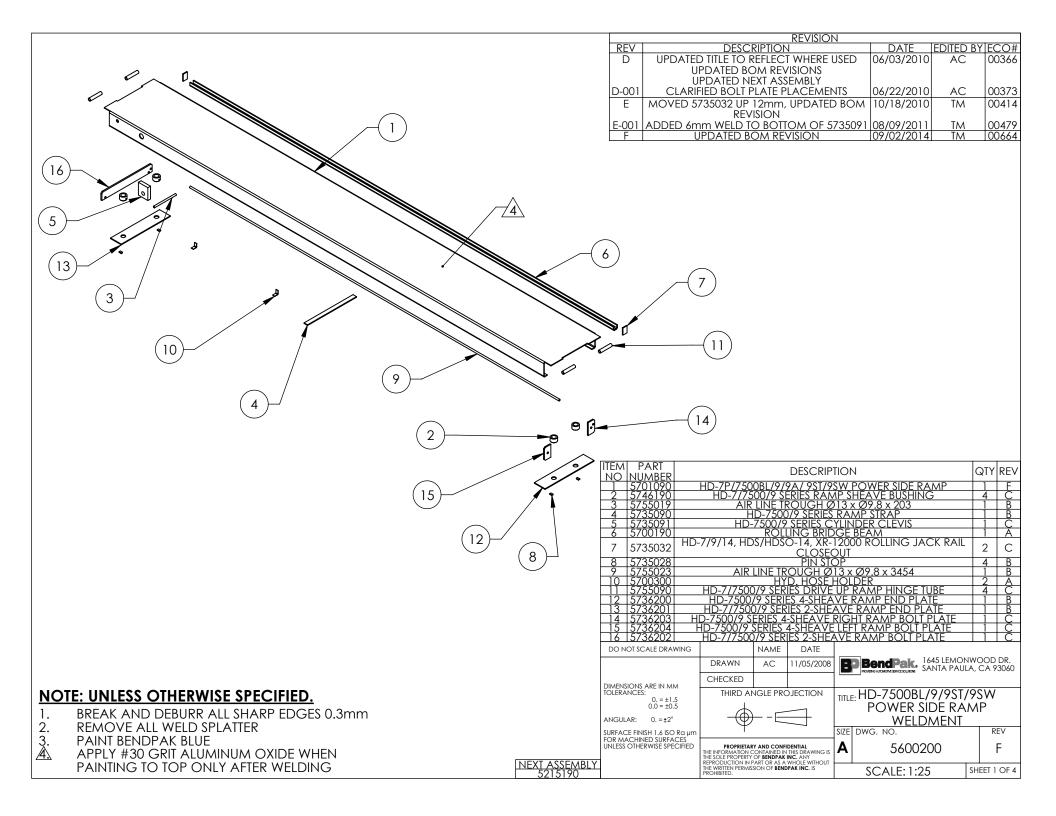

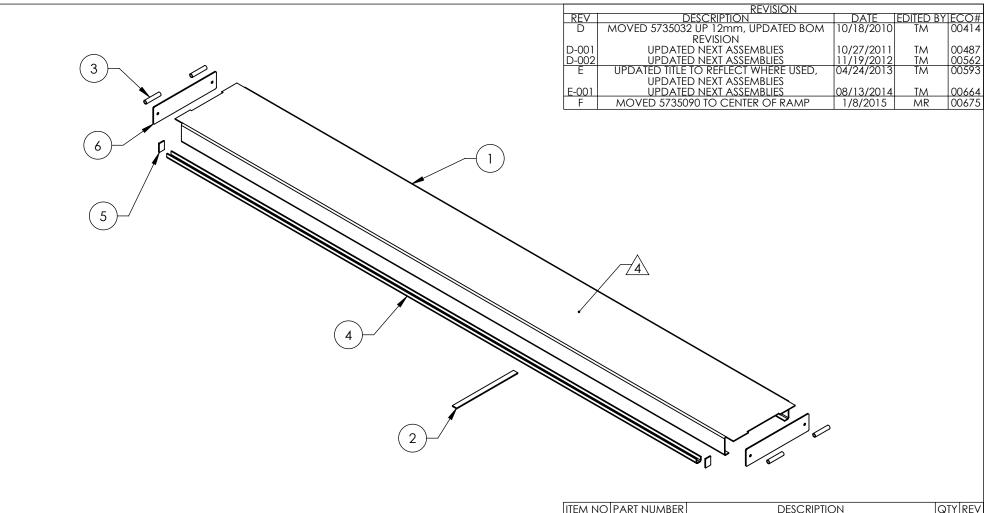

IIFW NO	PARI NUMBER	DESCRIPTION	QIY	REV
1	5701467	HD-7/7500/9 SERIES OFF SIDE RAMP	1	C
2	5735090	HD-7500/9 SERIES RAMP STRAP	1	В
3	5755090	HD-7/7500/9 SERIES DRIVE UP RAMP HINGE TUBE	4	U
4	5700190	ROLLING BRIDGE BEAM	1	Α
5	5735032	HD-7/9/14, HDS/HDSO-14, XR-12000 ROLLING JACK RAIL CLOSEOUT	2	C
6	5736090	HD-7/7500/9 SERIES RAMP END PLATE	2	U

DO NOT SCALE DRAWING NAME DATE DRAWN AC 11/05/2008 CHECKED CA 08/27/2015 DIMENSIONS ARE IN MM TOLERANCES: 0. = ±1.5 0.0 = ±0.5



HD-7500BL/9/9ST/9SW OFF SIDE RAMP WELDMENT

BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

NEXT ASSEMBLY ANGULAR: $0. = \pm 2^{\circ}$ 5245383

SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.

SIZE DWG. NO. 5600203

3. <u>4.</u> APPLY #30 GRIT ALUMINUM OXIDE WHEN PAINTING TO TOP ONLY AFTER WELDING

BREAK AND DEBURR ALL SHARP EDGES 0.3mm

NOTE: UNLESS OTHERWISE SPECIFIED.


REMOVE ALL WELD SPLATTER

PAINT BENDPAK BLUE

2.

5245390 5245395 5245396

SHEET 1 OF 3 SCALE: 1:20

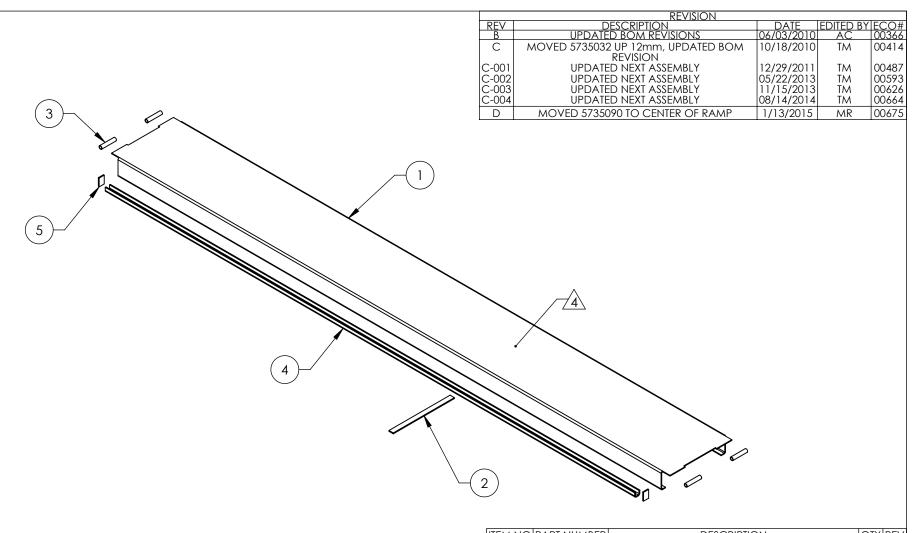

ITEM NO	PART NUM	\BER			DES	CRIPTION			QTY	REV
1	570146	7		HD-7/	7500/9 SE	RIES OFF	SIDE RAN	1P	1	С
2	573509	0		HD-	-7500/9 SE	RIES RAN	AP STRAP		1	В
3	3 5755090 HD-7/7500/9 SERIES DRIVE UP RAMP HINGE T				GE TUBE	4	С			
4	570019	0 ROLLING BRIDGE BEAM					1	Α		
5 5735032			HD-	7/9/14,	HDS/HDS JACK RA	SO-14, XR All Close		DLLING	2	С
DO NOT SCALE DRAWING			NAME	DATE	•		•			

	DRAWN	AC	11/05/2008
MENSIONS ARE IN MM	CHECKED	CA	08/27/2015
DLERANCES: MACHINE TO 0. = ±1.5 0.0 = ±0.5 0.00 = ±0.13 NGULAR: MACHINE TO 0. = ±½°	THIRD AT	GLE PRO	DJECTION
**	'		

.E:		
	HD-9SW SLIDE RAMP	
	TID 7011 OLIDE IO IVII	

BendPak. 1645 LEMUNWOOD D.... SANTA PAULA, CA 93060

SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. AN REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.

WELDMENT SIZE DWG. NO. REV 5600207 D SHEET 1 OF 3 **SCALE: 1:20**

BREAK AND DEBURR ALL SHARP EDGES 0.3mm

NOTE: UNLESS OTHERWISE SPECIFIED.


REMOVE ALL WELD SPLATTER


PAINT BENDPAK BLUE


2.

3.

APPLY #30 GRIT ALUMINUM OXIDE WHEN PAINTING TO TOP ONLY AFTER WELDING

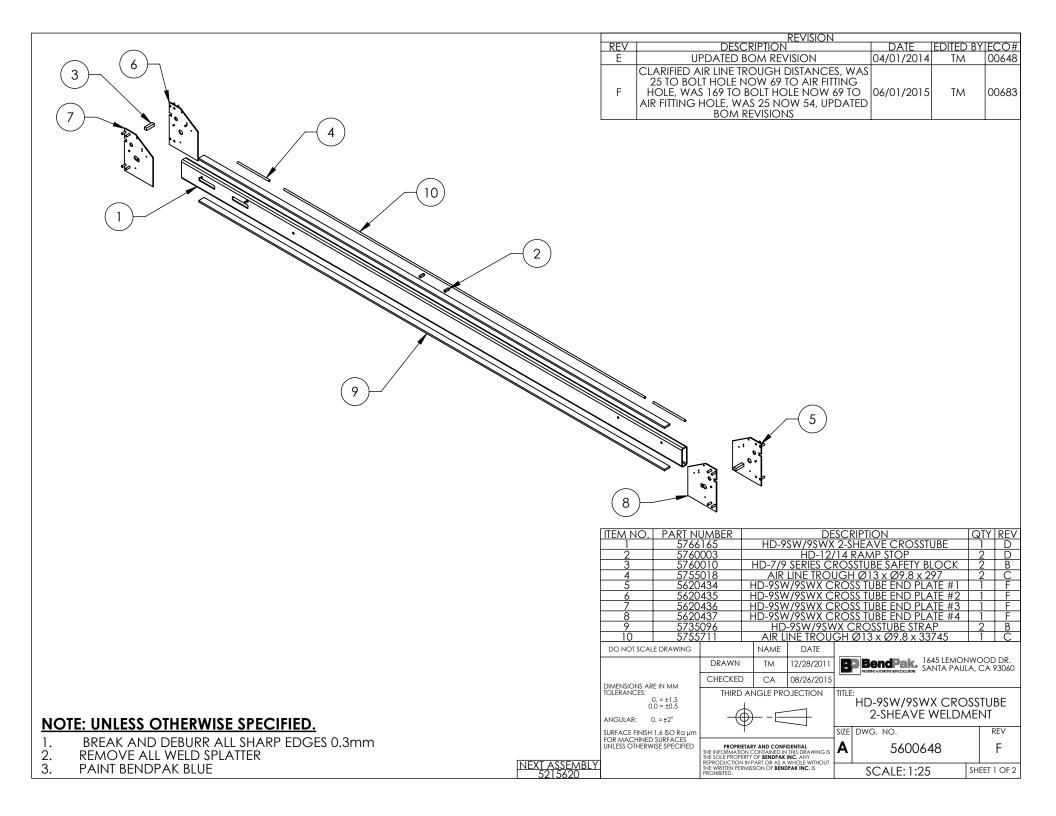

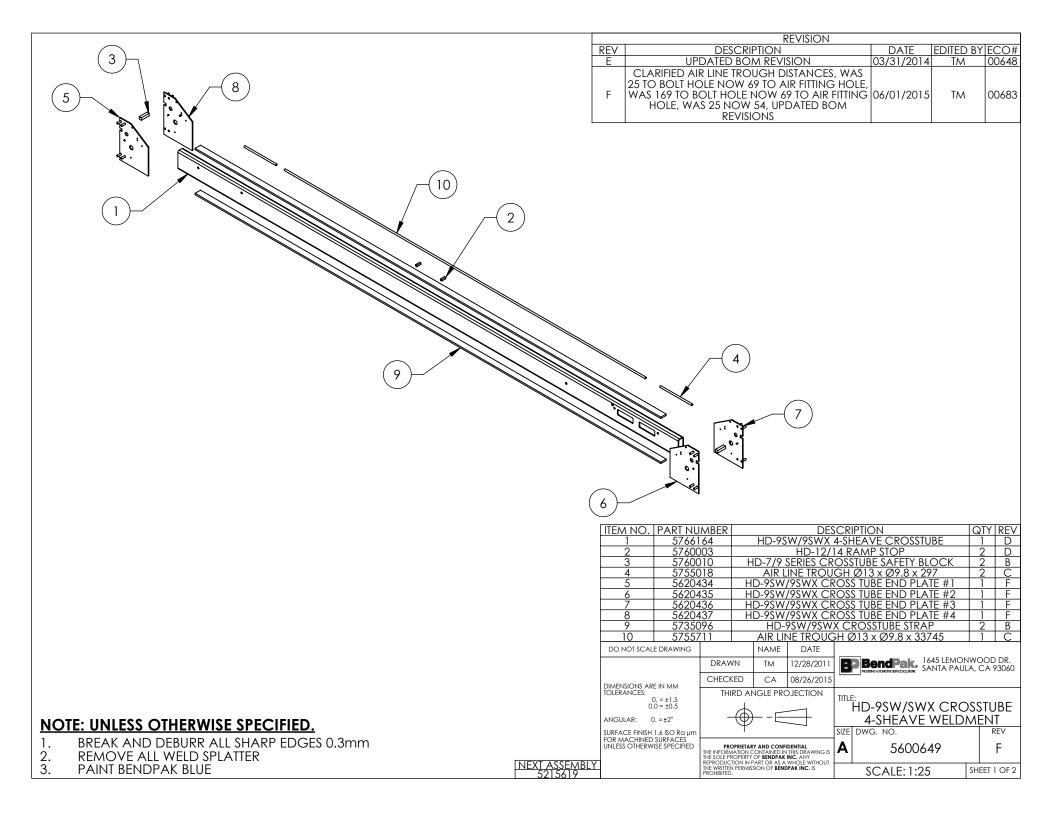

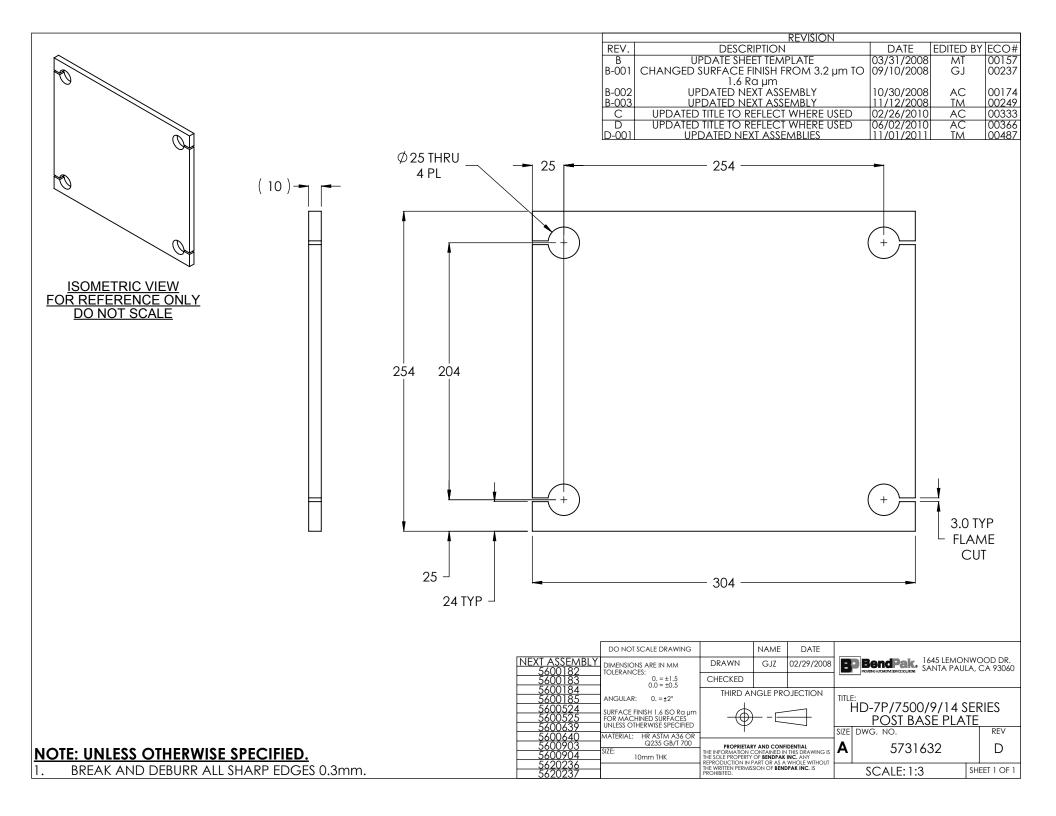



BENDPAK Number:	5900033
MRP Description:	HD-9SW/SWX INSTALLATION MANUAL
Date:	05/12/2016
ECO:	00741

1. Engineering Specification

Application:

INSTALLATION MANUAL

Detailed Description:



Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			




BENDPAK Number:	5900147
MRP Description:	SAFETY MANUAL ALI / SM 93-1
Date:	12/28/2010
ECO:	00431

1. Engineering Specification

Application:

ALI SAFETY MANUAL

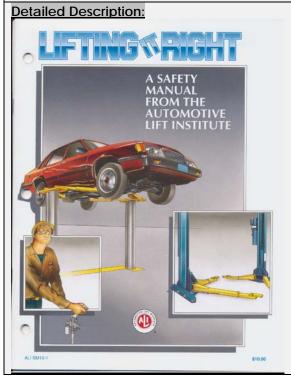

L				
	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
	1)			




BENDPAK Number:	5900152
MRP Description:	ALIGN OIM OPERATION INSPECTION & MAINTENANCE
Date:	12/28/2010
ECO:	00431

1. Engineering Specification

Application:

ALI OPERATION INSPECTION & MAINTENANCE MANUAL

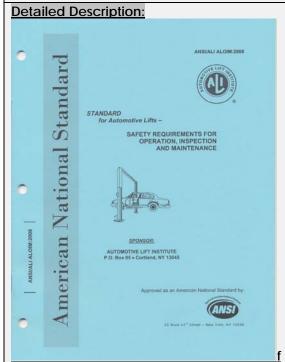

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905103
MRP Description:	WARNING ALI/WL 200
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

ALI 4 POST SAFETY STICKER KIT

Detailed Description:



<u>SIZE:</u> 11" L x 8.5" W (279mm x 216mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905151
MRP Description:	SAFETY TIPS CARD ALI-ST 90
Date:	12/28/2010
ECO:	00431

Application: ALI SAFETY TIPS Detailed Description: Automotive Lift SAFETY TIPS Professe skelling updated for yell the account resident by your fit operation. For interesting requires to the fit implications's natural. 1. Inspect yell, you when it you fit is a first implications's natural. 1. Inspect yell, you when it you fit is a first implications's natural. 1. Inspect yell, you when it you fit is a first implications's natural. 2. Inspect yell, you when it you fit is a first implications's natural. 3. Inspect yell, you when it you fit is a first individual year to be sharped. 4. Preliations of a sharped years, first individual years of a first individual year of a first individual years of a first individual year of a first

2. Vendor Information Approved Vendor Vendor Part # Contact # Preferred Vendor 1)



BENDPAK Number:	5905311
MRP Description:	BENDPAK LABEL; 4 x 38" WHITE INK
Date:	05/13/2015
ECO:	00689

1. Engineering Specification

Application:

BENDPAK LABEL


Detailed Description:



SIZE: 38" L x 4.25" W (965mm x 108mm)

- Material: Yellow Represents Clear Adhesive PET
- Size: 4.25"W x 38"H
- Thickness: 4 Mil
- Finish: Polished
- Ink: U.V. protected, Opaque White
- Print Process: Silk Screen, 85 line-screen (Opaque White ink, clear adhesive PET will fill in blank areas.)
- Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection


Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

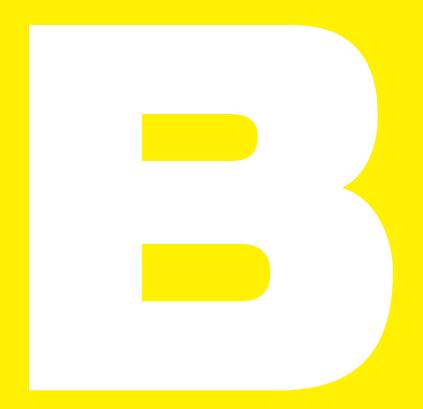







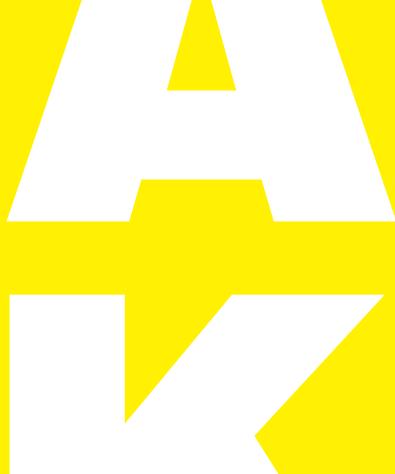



ABOVE OBOUND LIETO





1645 Lemonwood Driv Santa Paula, CA 93060 U.S.A. (805) 933-9970



BENDPAK Number:	5905402
MRP Description:	MAX CAP DANGER
Date:	12/10/2015
ECO:	00724

1. Engineering Specification

Application:

LIFT CAPACITY STICKER

Detailed Description:

ADANGER

THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 9000 lbs. / 4082 kg

Max. Lifting Cap. / Front of Lift Center 4500 lbs. / 2041 kg

Max. Lifting Cap. / Rear of Lift Center 4500 lbs. / 2041 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.

Size: 4"W x 5"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300

p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical,

and ultra violet protection

P/N 590540

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

ADANGER

THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 9000 lbs. / 4082 kg

Max. Lifting Cap. / Front of Lift Center 4500 lbs. / 2041 kg

Max. Lifting Cap. / Rear of Lift Center 4500 lbs. / 2041 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY

POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED

INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS

WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 — 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA



BENDPAK Number:	5905465
MRP Description:	MANUFACTURER LABEL
Date:	05/07/2013
ECO:	00593

1. Engineering Specification

Application:

MANUFACTURER LABEL

Detailed Description:

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY
POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS
WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER
UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE
MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER
AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS
RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:
BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE
CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE
RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC
ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR
CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR
INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086


BPK STYOT P20KVR X18576 HVY DTY/ GVR 832
THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA

SIZE: 5.125" L x 5.125" W (130mm x 130mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

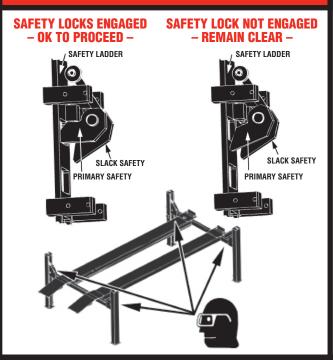

VISUALLY CONFIRM THAT ALL PRIMARY SAFETY LOCKS ARE ENGAGED BEFORE ENTERING WORK AREA. Suspension components used on this lift are intended

to raise and lower lift only and are NOT meant to be load-holding devises. Remain clear of elevated lift unless visual confirmation is made that all primary safety locks are fully engaged and the lift is LOWERED onto the safety locks. Refer to installation/operation manual for proper safety lock procedures and/or further instruction.

WIRE ROPE INSPECTION AND MAINTENANCE

Lifting cables should be replaced every (3) three years or when visible signs of damage are apparent. DO NOT USE LIFT WITH DEFECTIVE OR WORN CABLES.

- Wire rope should be maintained in a well-lubricated condition at all times. Wire rope is only fully protected when each wire strand is lubricated both internal and external.
- Excessive wear will shorten the life of the wire rope. The factory suggests wire rope lubricant that penetrates to the core of the rope and provides long-term lubrication between each individual strand. In order to make sure that the inner layers of the rope remain well lubricated, lubrication should be carried out at intervals not exceeding three (3) months during operation. All sheaves and guide rollers in contact with the moving wire rope should be given regular visual checks for surface wear and lubricated to make sure that they run freely. This
- operation should be carried out at appropriate intervals generally not exceeding three (3) months during operation. For all sheave axles, the factory recommends standard wheel bearing grease. For all sheaves and/or guide rollers, the factory recommends 90-WT gear oil or similar heavy lubricant applied by any method including pump/spray dispensing, brush, hand and/or swabbing. Failure to read, understand and follow these instructions may

cause death or serious injury. Read and understand these instructions

IMPORTANT **OPERATION / MAINTENANCE**

INSTRUCTIONS - PLEASE READ TO RAISE LIFT Position vehicle tires at the center of each runway. ✓ Set parking brake or use wheel chock to hold vehicle in position. ✓ Before raising vehicle, be sure all personnel are clear of lift and surrounding area. Pay careful attention to overhead clearances.

Raise lift to desired height by pressing push button on power unit.

Maintain visual contact with vehicle and surrounding area at all times while lowering lift. STOP IMMEDIATELY if load shifts or becomes unlevel. ✓ After vehicle is raised to desired height, lower lift onto the nearest

- safety lock. Do not allow cables to become excessively slack. ALWAYS INSURE ALL PRIMARY SAFETY LOCKS ARE ENGAGED before entering work area.
- **TO LOWER LIFT** Before lowering vehicle, be sure all personnel, tools and equipment

Lower vehicle by pressing power unit lowering handle until lift has

least two inches to allow adequate clearance for locks to clear. Press push button AIR SAFETY VALVE and HOLD.

Raise lift by pressing RAISE BUTTON on power unit. Elevate lift at

- descended completely. When lowering lift PAY CAREFUL ATTENTION that all personnel and objects are kept clear.
- ALWAYS make sure that ALL LOCKS are disengaged. If one of the locks inadvertently engages on descent, lift and/or vehicle may disrupt causing personal injury or death.

ALWAYS keep a visual line of site on lift AT ALL TIMES.

are clear of lift and surrounding area.

REQUIRED MONTHLY MAINTENANCE ALWAYS consult operation manual for factory recommended maintenance.

Adjust lift cables to ensure lift raises level and safety locks

- engage simultaneously. Check all chain/cable connections, bolts and pins to insure
- proper mounting.
- Visually inspect safety locks for proper operation. Visually inspect concrete floor. DO NOT USE LIFT if concrete foundation shows signs of deterioration.
- Inspect all anchor bolts and retighten if necessary. Check columns for squareness and plumb.
- ✓ Inspect all bolts and/or fasteners making sure they are properly secured.
- Make a visual inspection of ALL MOVING PARTS and check for excessive signs of wear.

by dampness is not covered under warranty.

- ✓ Replace ALL FAULTY PARTS before lift is put back into operation. AWARNING
- 1. WARNING: If cement anchor bolts are loose, or any component
- of the lift is found to be defective, DO NOT USE LIFT! 2. Never operate the lift with any person or equipment below.
- Never exceed rated capacity. 4. Always insure safety locks are engaged before any attempt is
- made to work on or near vehicle. 5. Never leave lift in an elevated position unless the safety locks are engaged.

6. Do not permit electric motor to get wet! Motor damage caused



BENDPAK Number:	5905556
MRP Description: 4-POST SAFETY DECAL	
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

4-POST SAFETY DECAL

Detailed Description:



SIZE: 23" L x 4" W (584m x 100mm)

	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)				



BENDPAK Number:	5905940
MRP Description:	PRODUCT DATA LABEL
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

PRODUCT DATA LABEL

Detailed Description:



SANTA PAULA, CA USA WWW.BENDPAK.COM

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS POWER: ELECTRIC/HYDRAULIC INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT OPERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT AND, IF THEY ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID. CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS.

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM 6488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC). AND/OR INTERNATIONAL BUILDING CODE (IBC).

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

DO NOT REMOVE ENGINEERED BY BENDPAK INC. USA

MADE IN CHINA

SIZE: 2.3" L x 4.5" W (58mm x 114mm)

	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



SANTA PAULA, CA USA WWW.BENDPAK.COM

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS POWER: ELECTRIC/HYDRAULIC INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT THE PERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT AND, IF THEY ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

DO NOT REMOVE

ENGINEERED BY BENDPAK INC. USA

MADE IN CHINA



BENDPAK Number:	5905952
MRP Description:	LABEL C (4-POST LIFTS NO CE)
Date:	11/23/2015
ECO:	00740

1. Engineering Specification **Application:** DATA SERIAL TAG, 4-POST LIFTS, NO CE **Detailed Description:** Santa Paula, CA USA www.bendpak.com BP BendPak. SIZE: 3.38" L x 3.38" W MODEL NUMBER SERIAL NUMBER (85.7mm x 85.7mm) LIFT CAPACITY DATE OF MFG. ROLLING JACK MAX CAP. MAX PSI / BAR 110-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph 208-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph DANGER! PN 5905952

2. Vendor Information (Or for Reference)

	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)				
2)				
OR BENDPAK ENGINEERING APPROVED EQUIVALENT				



Santa Paula, CA USA www.bendpak.com

MODEL NUMBER

SERIAL NUMBER

LIFT CAPACITY

DESCRIPTION

ROLLING JACK MAX CAP.

MAX PSI / BAR

VOLTAGE

- 110-240VAC, 50-60 Hz, 1 Ph 208-240VAC, 50-60 Hz, 1 Ph
- 380-415VAC, 50-60 Hz, 3 Ph
- 208-440VAC, 50-60 Hz, 3 Ph

DATE OF MFG.



WARRANTY VOID IF DATA PLATE IS REMOVED





PN 5905952



2016 NON-CE 4 Post Lifts Colors & Graphics

MODELS:

HD-9SW HDS-40 HD-9SWX HDS-40X HD-14T HD-9AE

4/7/16

CONFIDENTIAL INFORMATION.

You may not disclose, print, copy or disseminate this information.

Unauthorized use is a violation of federal criminal law.

4 Post Lifts Product Decal Positioning



B

WISUALLY CONFIRM THAT ALL PRIMARY
AND THE CONFIRM THAT ALL PRIMARY
AND THAT ALL PRIMARY
AND THE CONFIRM THAT ALL PRIMARY
AND THAT ALL PRIMARY
AND THE CONFIRM THAT ALL PRIMARY
AND THE CONFIRM THAT ALL PRIMARY
AND THAT ALL PRIMARY
AND THE CONFIRM THAT ALL PRIM

IMPORTANT

OPERATION / MAINTENANCE
INSTRUCTIONS - PLEASE READ

Plants and the control of the con

C



Ali_4_Post_labels.pdf: (Order Labels from ALI)

Total of 4

PN 5905311

BPK Post Branding Decal-Large_5905311.pdf:

Material: Clear Adhesive PET Size: 4.25"W x 38"H Thickness: 4 Mil

Finish: Polished

Ink: U.V. protected, Opaque White

Print Process: Silk Screen, 85 line-screen (Yellow color in file represents what should be clear PET material and SHOULD NOT print as Yellow ink. White area in file represents Opaque White ink.)

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

4_Post_Safety_Decal.pdf:

Size: 4"W x 23"H

Material: White Vinyl Pressure Sensitive Adhesive

PN 5905556

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished


Print Process: Offset Lithography - 200 line-screen

or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

4 Post Lifts Product Decal Positioning





P/N 5905401 - Max Cap. Danger 7k P/N 5905695 - Max. Cap. Danger 7500 P/N 5905402 - Max Cap. Danger 9k P/N 5905557 - Max. Cap. Danger 14K P/N 5905406 - Max Cap. Danger 18k P/N 5905407 - Max. Cap. Danger 27K P/N 5905408 - Max. Cap. Danger 35K

P/N 5905409 - Max. Cap. Danger 40K

*Max. Cap. Danger.pdf:

Size: 4"W x 5"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

MAXIMUM LIFTING CAPACITY
Lbs.
Kg.

P/N 5905645 - NRTL_Lifting_Cap_Label_7K
P/N 5905700 - NRTL_Lifting_Cap_Label_7500
P/N 5905650 - NRTL_Lifting_Cap_Label_9k
P/N 5905665 - NRTL_Lifting_Cap_Label_14k
P/N 5905675 - NRTL_Lifting_Cap_Label_18k
P/N 5905680 - NRTL_Lifting_Cap_Label_27k
P/N 5905685 - NRTL_Lifting_Cap_Label_35K
P/N 5905690 - NRTL_Lifting_Cap_Label_40K

*NRTL_Lifting_Cap_Label_.pdf:

Size: 4.5"W x 3.25"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

*DEPENDS ON LIFT MODEL AND CAPACITY



PN 5905940

Product_Data_Label_5905940-New.pdf:

Size: 4.5"W x 2.3"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection



PN 5905952

2015_Serial_Tag-C-5905952.jpg:

Size: 3"W x 3"H

Material: Material: 2 Mil. Matte Silver Polyester


(Flex-PSE)

Print using thermal transfer printer with resin ribbon


Ink: 1 Color-Black



4 Post Lifts Product Decal Positioning

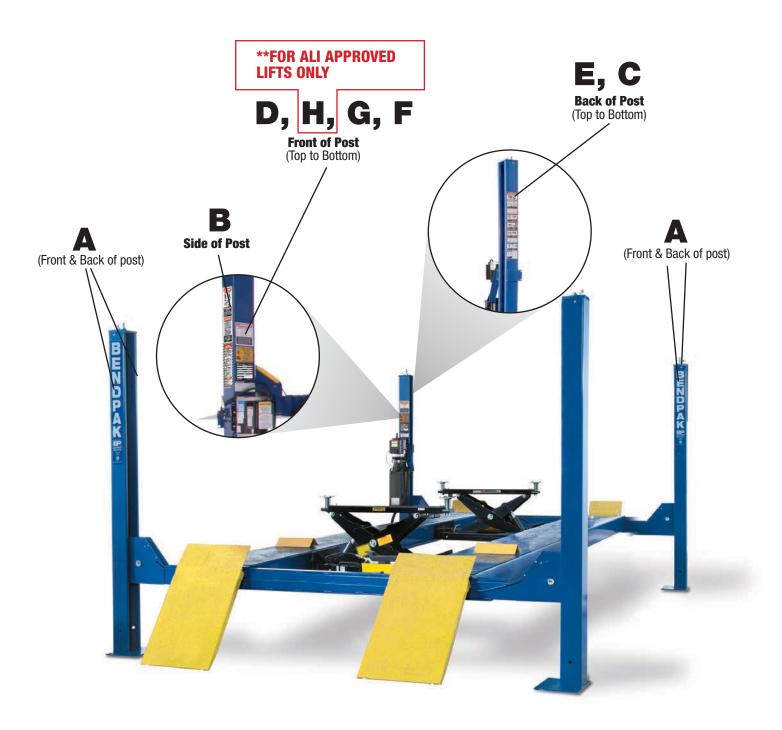

4 Post Lifts Packaging

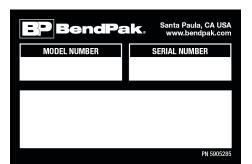

Serial Tag New-2015 Peel Off-5905285.jpg:

Size: 3"W x 3"H

Material: 2 Mil. Matte Silver Polyester (Flex-PSE) Print using thermal transfer printer with resin ribbon

Ink: 1 Color-Black

PEEL OFF INVENTORY LABEL

SERIAL NUMBER

Do not remove back sheet of this portion to prevent from sticking completely as shown in image.





MFD. BY BENDPAK INC.

CAPACITY: MED/HVY DTY ANCHORS: AS EQUIPPED LIFT TYPE: SURFACE MOUNT POWER: ELECTRIC/HYDRAULIC INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS
WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER
UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE
MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER
AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS
RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:
BENDRAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE
CRITERIA AS PRESCRIBED BY ASTM E488 — 96(2003), LIFT BUYERS ARE
RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC
ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR
CODES SUCH AS THE UNITOR BUILDING CODE (UBC) AND/OR
INTERNATIONAL BUILDING CODE (IBC).



BPK STYOT P20KVR X18576 HVY DTY/ GVR 832
THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA

Manufacturer Packaging Label:

Size: 5"W x 5"H

Material: White adhesive paper Ink: U.V. protected CMYK 2/C Process

Print Process: Offset Lithography - 200 line-screen or 300

p.p.i. for digital