



Foldable drive-in ramps to avoid sharp edges.(each lift 4 units).

MODEL 409-DP 409-DPX

The new creations are real space masters. They max your garage and creat four comfortable parking spaces. Low profile design, so easy to drive in and park on. 409-DPX is a wider and higher model than 409-DP.


FEATURES

- Lifting capacity: 4000kg(9,000lbs), max. car weight:2800kg (6,000lbs).
- Low profile design, minimum platform height only 155mm(6 3/32").
- Both primary & slack-cable safety devices as standard.
- Exclusive: hidden safety locks and manual single-point safety release.
- Exclusive: Foldable drive-on ramps come as standard of 4 units.
- Exclusive: Ingenious designs to minimize the package size, reduces the transportation charge and storage cost.
- Exclusive: Double-Shaped columns for increased strength.
- Non-slip diamond platforms.
- Adjustable multiple safety ladders.



EXCLUSIVE FEATURE


Special structure design to allow back-to-back Installation.

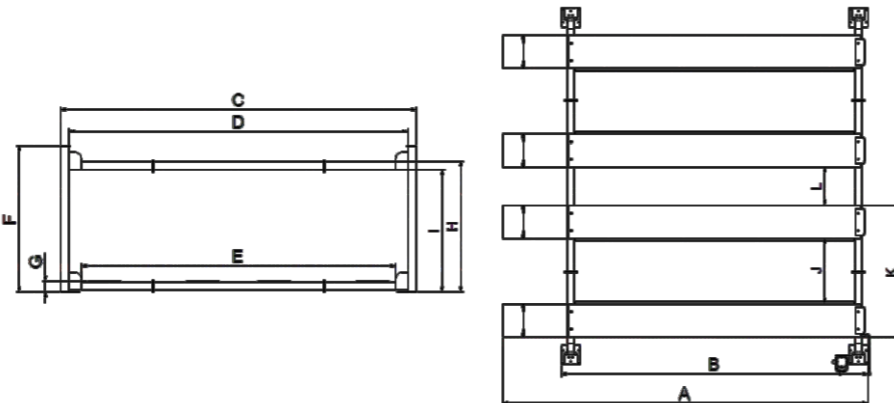


SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A	B	C	D	E	F	G	H	I	J	K	L	Gross Weight	Motor Power		
			Overall Length (Inc.Ramps)	Overall Length (No Inc. Ramps)	Overall Width	Width Between Columns	Drive Through Width	Overall Height	Minum Height	Lifting Height	Max. lock height to top of runway	Max. height underneath runway	Max. lock height underneath runway	Width Between Runways	Overall width of single parking unit	Width Between two parking units		
409-DP	4000kg (9,000lbs)	47S	5265mm (207 9/32")	4415mm (173 13/16")	5120mm (201 9/16")	4878mm (192 1/16")	4514mm (177 23/32")	2105mm (82 7/8")	155mm (6 3/32")	1872mm (73 11/16")	1082mm (70 15/16")	1772mm (69 3/4")	1702mm (67")	940mm (37")	1890mm (74 13/32")	550mm (21 21/32")	1275kg (2810lbs)	2.0HP/3.0HP 220V Single Phase
409-DPX	4000kg (9,000lbs)	57S	5965mm (234 27/32")	5115mm (201 3/8")	5120mm (201 9/16")	4878mm (192 1/16")	4514mm (177 23/32")	2455mm (96 5/8")	155mm (6 3/32")	2227mm (87 11/16")	2157mm (84 15/16")	2127mm (83 3/4")	2057mm (80 31/32")	940mm (37")	1890mm (74 13/32")	550mm (21 21/32")	1425kg (3142lbs)	2.0HP/3.0HP 220V Single Phase

EXCLUSIVE FEATURES

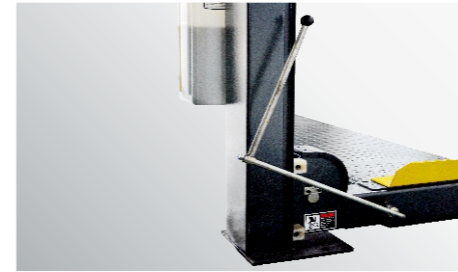


Hidden locks and manual single-point safety release.

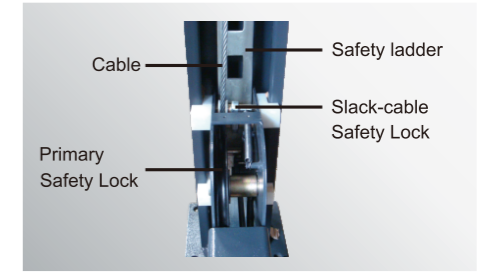

Double safety locks provide additional safety.



Special structure design to allow back-to-back installation.

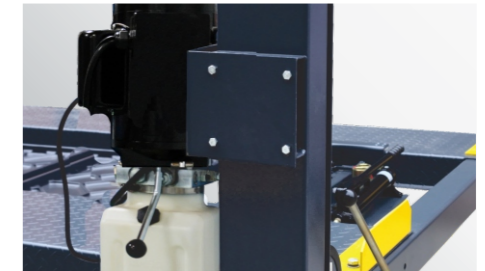


90° degree motor installing plate.


OPTIONAL PARTS




Optional plastic oil tray (Kits No.: 40806), 1set 4pcs.

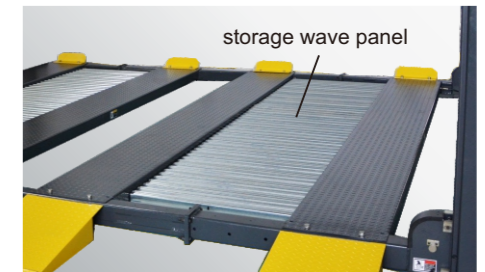

Optional storage wave panel (Kits No. 40812)

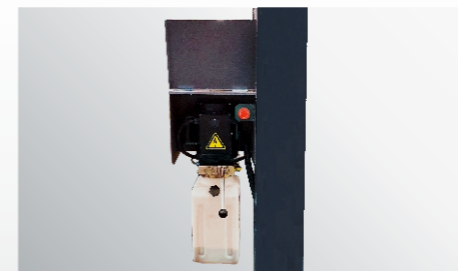

Optional Motor protect cover for outdoor installation (Kits No.: 40810) with emergency stop switch.

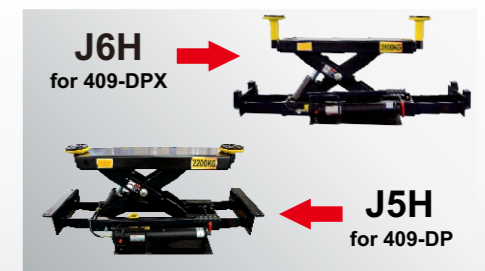

Optional Slider jack with handle pump incl. 1.5" and 2.5" extension adapters.

Distributed By: