

HD-7PXW

Four-Post Lifts

SKU# 5175516

7,000-lb. Capacity / Super-Tall Rise / Four-Post Lift / Vehicle Display Platform

Questions? Contact Babco's Sales Team

info@babco.ca | 1-800-661-5313

Amazingly Tall Four-Post Car Lift

The HD-7PXW four-post lift has a 7,000-lb. lift capacity and 188" long runways to accommodate a variety of vehicle types and wheelbases. The HD-7PXW has all the same safety and convenience features as other BendPak four-post lifts. A one-touch pneumatic safety release instantly releases all locks simultaneously, and the lift's lone hydraulic cylinder is neatly tucked under the power-side runway. There's simply no better-looking and higher-reaching car lift on the market than the HD-7PXW.

Features

- 7,000-lb. maximum lifting capacity
- Super tall rise of delivers 12-feet of lifting height
- Electric / hydraulic power system
- Single hydraulic cylinder mounted underneath runway
- Internal anti-sway slider blocks in each column
- Oversized self-lubricating cable rollers
- Features heavy-duty 3/8" aircraft cable
- Rugged 1.25" roller axles
- Multi-position safety locks in each column
- Adjustable lock ladders
- Ramps feature non-skid surface
- Push-button pneumatic safety release




Note: An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.

Specifications

Questions? Contact Babco's Sales Team
info@babco.ca | 1-800-661-5313

Model	HD-7PXW
Style	Wide Width / Super Tall Lift
SKU#	5175516
Lifting Capacity	7,000 lbs. (3,175 kg)
A - Min. Runway Height	4.5" (114 mm)
B - Max. Rise	140" (3,556 mm)
C - Max. Lifting Height	145" (3,683 mm)
D - Overall Width	110.25" (2,800 mm)
E - Outside Length	198" (5,029 mm)
F - Overall Length	224.5" (5,702 mm)
G - Height of Columns	158" (4,013 mm)
H - Width Between Columns	100" (2,540 mm)
I - Drive-Thru Clearance	86.5" (2,197 mm)
J - Runway Width	19" (483 mm)
K - Length of Runways	188" (4,775 mm)
L - Width Between Runways	37.5" (952 mm) - 44.5" (1,130 mm)
M - Runway Centerline	56.5" (1,435 mm) - 63.5" (1,613 mm)
N - Outside Edge of Runways	75.5" (1,918 mm) - 82.5" (2,096 mm)
Min Wheelbase @ Capacity	135" (3,429 mm)
Min Wheelbase @ 75% Capacity	115" (2,921 mm)
Min Wheelbase @ 50% Capacity	95" (2,413 mm)
Min Wheelbase @ 25% Capacity	80" (2,032 mm)
Time to Full Rise	60 sec
Locking Positions	30
Lock Spacing	every 4" (102 mm)
Motor	208-230 VAC / 50-60 Hz / 1 Ph

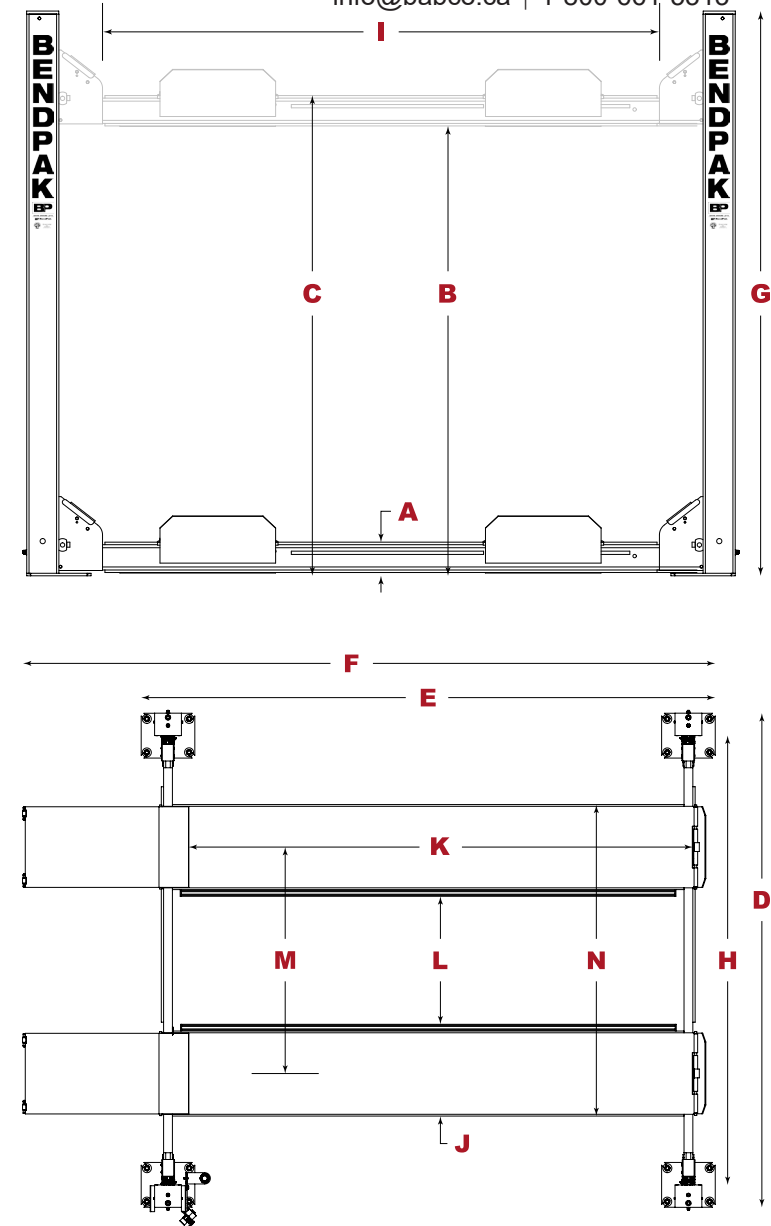

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.